

Electric Tow Tractor 2.5-3T



Introduction

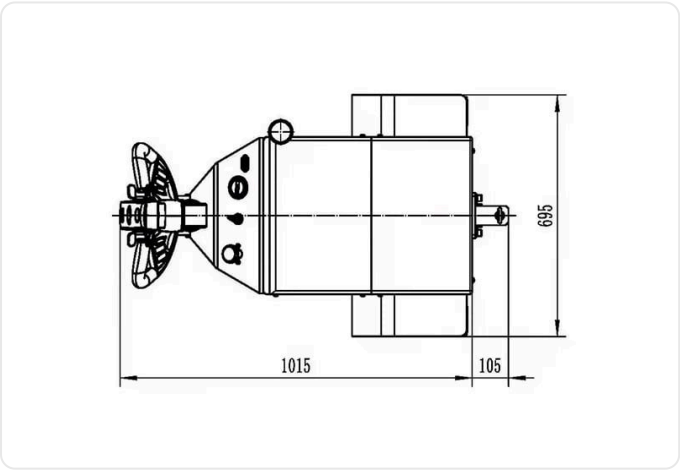

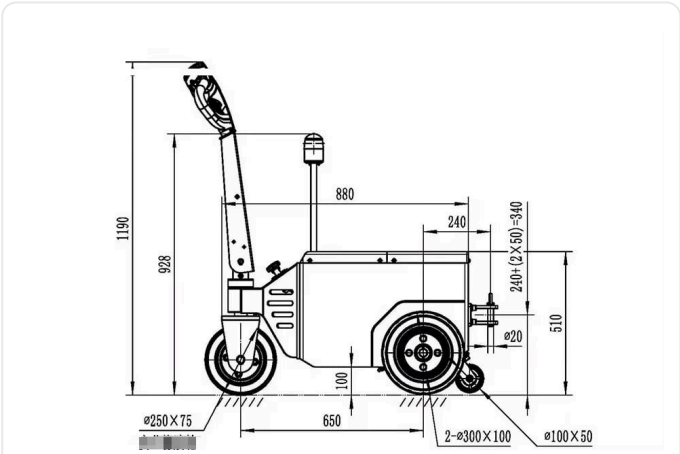

Specifications

Model	FSMQ25	FSMQ30
Controller type	Fully electric	Fully electric
Rated towing capacity (kg)	2500	3000
Drawbar pull (N)	700	1100
Weight (with battery) (kg)	230	350

Model	FSMQ25	FSMQ30
Wheelbase (mm)	650	770
Overall height (mm)	1190	1200
Overall length (mm)	1100	1260
Chassis width (mm)	680	800
Coupling height (mm)	235 / 285 / 335	235 / 285 / 335
Ground clearance (mm)	100	100
Turning radius (mm)	950	108
Tire type	Solid rubber	Solid rubber
Front wheel size (mm)	Φ300	Φ380
Rear wheel size (mm)	Φ250	Φ300
Travel speed (km/h)	7.1	5
Gradeability (%)	10	8.5
Drive system	DC	AC
Motor power (kW)	1.3	1.5
Battery voltage/capacity (V/AH)	24/80	24/107
Controller	CURTIS	CURTIS

Contact us for consultation and a quotation

Vietnam factory: Workshop A1-1, VSIP Hai Phong, Nam Trieu Ward, Hai Phong City · +84 817 888 198
Taiwan factory: Zhongli District, Taoyuan City · +886 3-451-8806
Email: sales@fullsharp.com.vn · **Website:** www.fullsharp.com

Specifications may vary with the ordered configuration. Please contact FullSharp for exact details.