
Electric Tow Tractor 6-10T



Introduction

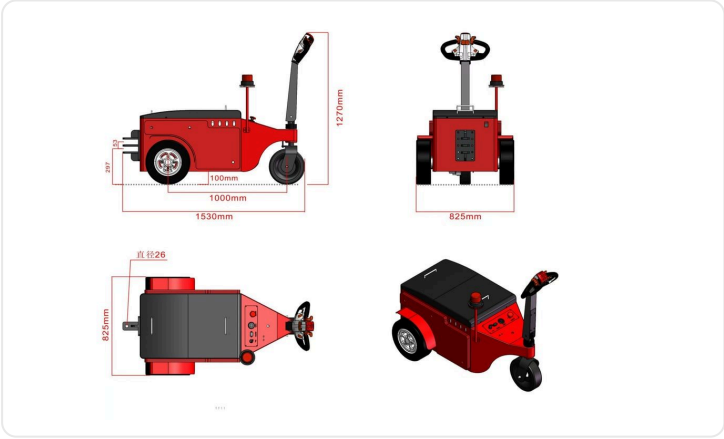

FSMQ60 / FSMQ80 / FSMQ100 Electric Tow Tractor Specifications

Specification	FSMQ60	FSMQ80	FSMQ100
Technical features			
Vehicle type	Electric		
Operation type	Walk-behind		
Max. towing load (kg)	6000	8000	10000
Rated drawbar pull (N)	2500	3000	3600

Specification	FSMQ60	FSMQ80	FSMQ100
Max. drawbar pull (N)	3500	4000	4500
Track width (mm)	999		
Dimensions			
Overall height (mm)	1205		
Handle height (mm)	950 / 1150		
Coupling height (mm)	300 / 360		
Overall length (mm)	1775		
Chassis width (mm)	805		
Ground clearance (mm)	100		
Turning radius (mm)	1450		
Wheels			
Tire type	Solid rubber tires with PU core		
Drive wheel size (mm)	2 x Φ375 x 122		
Load wheel size (mm)	Φ300 x 90	Φ300 x 90	Φ300 x 100
Support wheel (mm)	Φ100 x 50		
Number of drive / load wheels	2x / 1		
Front steering wheel (mm)	683		
Performance			
Travel speed (laden/unladen) (km/h)	4.5 / 7.0		
Gradeability (%)	5 / 8		
Brake type	Electromagnetic		
Motor & power			
Rated power S2 60 min (kW)	2.5	2.8	3.0
Battery (external)	24V / 30Ah		
On-board battery	4x6 / 203	4x6 / 240	4x12 / 83
Weight			
Total weight (with battery) (kg)	580	650	750
Battery weight (kg)	136	136	104
Other			
Control type	AC		
Steering type	Mechanical		
Noise level	< 70 dB(A)		
Coupling type	Pin type (Latch)		

Contact us for consultation and a quotation

Vietnam factory: Workshop A1-1, VSIP Hai Phong, Nam Trieu Ward, Hai Phong City · +84 817 888 198
Taiwan factory: Zhongli District, Taoyuan City · +886 3-451-8806
Email: sales@fullsharp.com.vn · **Website:** www.fullsharp.com

Specifications may vary with the ordered configuration. Please contact FullSharp for exact details.