FS-Mandy190-270-SPF




The FS-Mandy-SPF stainless steel lifter series (FS-Mandy190, FS-Mandy220, FS-Mandy270) is a modern lifting solution with a maximum capacity of 300kg and a lifting stroke of up to 2250mm. Built from 304 stainless steel, it has a simple control panel plus optional upgrades such as ASP position memory, RMC remote control, and a scale + roller + safety fence system. Standard lifting speed is 125 mm/s, protection class is IP66, and it runs on a DC24V20AH battery, suiting industries such as packaging, food and logistics.

FS-Mandy-SPF Lifter Specifications

Model	FS-Mandy190-SPF	FS-Mandy220-SPF	FS-Mandy270-SPF
Mast height H	1900	2200	2700
Lifting height R	1300 - 1450	1300 - 1750	1300 - 2250
Control panel	Power button - Up/down buttons - Emergency stop (EMS) - Battery indicator		
Main material	304 stainless steel		
Roller platform	Material: 304 stainless steel Frame material: 304 stainless steel (removable) Dimensions: customizable to requirements		
Load capacity	**300kg**		
Lifting speed	125 mm/s (standard)		
Applications	Plastic crates, carton boxes, stainless steel bins, powder bags, sacks, fabric bags...		
Protection class	IP66		
Battery	DC24V20AH (standard)		
Charger	Input: 100-240V AC		

Model	FS-Mandy190-SPF	FS-Mandy220-SPF	FS-Mandy270-SPF
Options	ASP keylock upgrade (3 working positions × 5 memory positions) RMC remote control Scale platform + retaining strap Roller conveyor platform Scale platform + rollers + fence For more options, please contact FULL-SHARP		

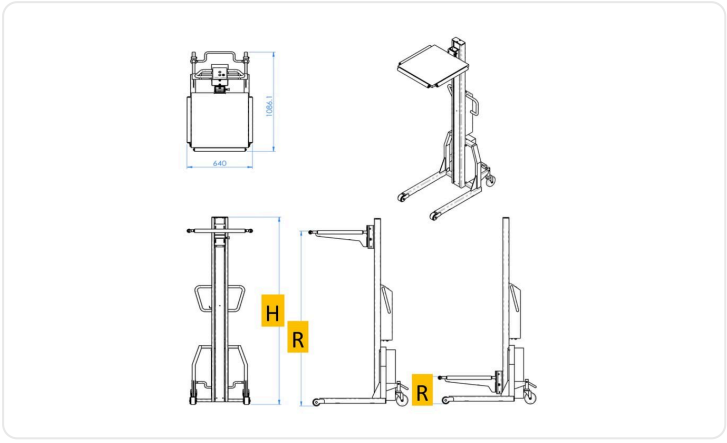

Contact us for consultation and a quotation

Vietnam factory: Workshop A1-1, VSIP Hai Phong, Nam Trieu Ward, Hai Phong City · +84 817 888 198

Taiwan factory: Zhongli District, Taoyuan City · +886 3-451-8806

Email: sales@fullsharp.com.vn · **Website:** www.fullsharp.com

Specifications may vary with the ordered configuration. Please contact FullSharp for exact details.