FS-MandyGO-GT




FS-MandyGO-GT is a compact lithium battery roll lifter with a load capacity of up to 200kg and a lifting height of 530 to 1250mm , featuring a simple control panel plus audible and visual operation warnings. It is built from 304 stainless steel , lifts at 125 mm/s and offers two travel speed ranges (0.2–4.5 km/h), handling both large and small diameter rolls. The fast-charging lithium battery recharges in just 2.5 hours , supporting continuous operation and easy maintenance (oil-free chassis). The unit is ideal for high-hygiene environments such as pharmaceutical and food production, with extensive customization for rolls and lifted materials.

Specifications

Model	FS-MandyGO-GT
Dimensions	1884 x 1200 x 1575mm
Lifting height R ***Lift height***	Gripper center 530 – 1250 mm
Load capacity ***Load***	200kg
Lifting speed ***Lifting speed***	125 mm/s
Protection rating ***Protection level***	IP41
Battery ***Battery***	DC24V40AH lithium battery
Charging ***Charging***	Input 100–240V AC, 50/60Hz
Charging time ***Charging time***	2.5 hours
Material ***Material***	304 stainless steel

Model	FS-MandyGO-GT
Weight ***Weight***	465kg
Travel speed ***Forward power speed***	Low speed 0.2 – 1.5 km/h High speed 2 – 4.5 km/h
Product features ***Feature of product***	Operation warning sound and warning light (optional) Simple, intuitive control panel Precise lift point memory Fast-charging, long-life lithium battery Oil-free, maintenance-free chassis Easy to operate
Applicable materials ***Applicable materials***	Roll OD ≤ 600mm, ≤ 250kg Roll OD 800–1000mm, ≤ 200kg Minimum OD < 60mm can be customized to actual needs

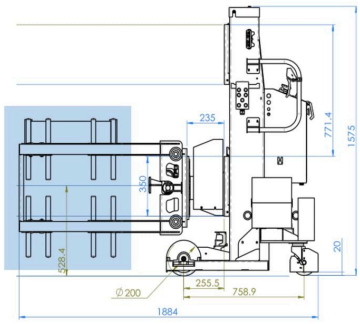

Contact us for consultation and a quotation

Vietnam factory: Workshop A1-1, VSIP Hai Phong, Nam Trieu Ward, Hai Phong City · +84 817 888 198

Taiwan factory: Zhongli District, Taoyuan City · +886 3-451-8806

Email: sales@fullsharp.com.vn · **Website:** www.fullsharp.com

Specifications may vary with the ordered configuration. Please contact FullSharp for exact details.