
FS-SFX




The glass lifter series FS-SFX has a flexible structure that can be assembled in various configurations depending on the glass size. The unit allows manual rotation 0-360° and manual tilting 0-90° . The system is equipped with dual batteries and an optional remote control for easy operation. The dual-circuit control system ensures safe operation and meets EU standards.

Key features

- Flexible product range, designed in multiple configurations to suit panel sizes
- Manual tilting 0°–90° and manual rotation 0°–360°
- Optional wireless remote control
- Simple operation and high durability, with 2 built-in batteries for long operating time
- Equipped with an independent dual-circuit control system, EU certified for maximum safety

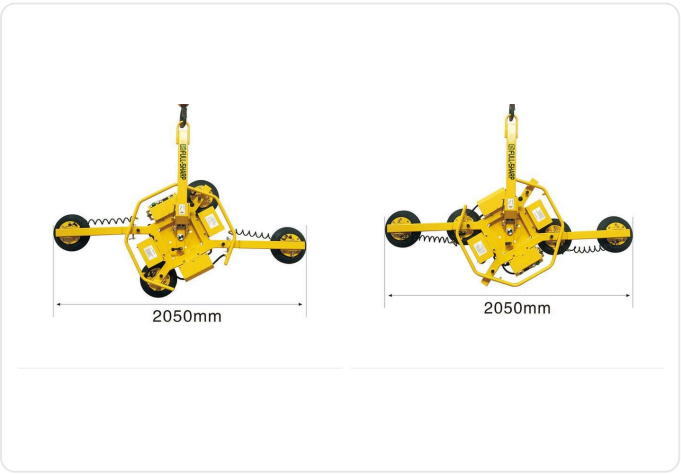

Mounting method A

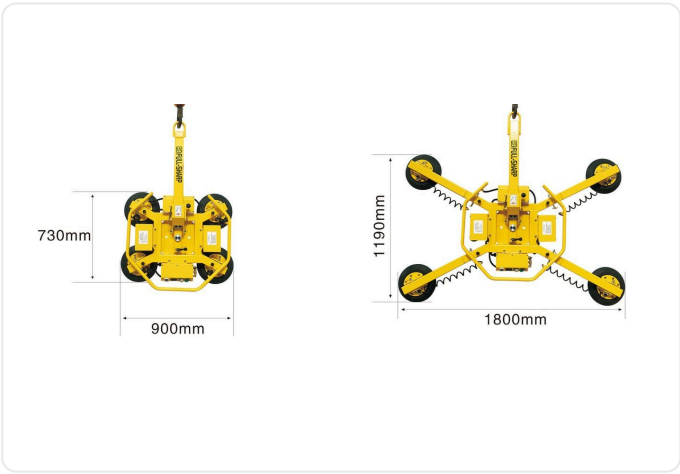

Mounting method B

Specifications

Model	Safe working load	Dimensions	Pad diameter	Number of pads	Power source	Control mode	Features
FS-SFX400-4S	400kg	900×730×240	Φ300	4	DC12V	Manual / Remote	Manual tilt 0-90°, manual rotation 0-360°, single / dual circuit
FS-SFX600-6S	600kg	1800×1190×240	Φ300	6			
FS-SFX800-8S	800kg	1800×1190×240	Φ300	8			
FS-SFXD400-4S	400kg	850×680×320 (extended: 1680x1160x320)	Φ300	4			
FS-SFXD600-6S	600kg	1680x1160x320	Φ300	6			
FS-SFXD800-8S	800kg	1680x1160x320	Φ300	8			

Contact us for consultation and a quotation

Vietnam factory: Workshop A1-1, VSIP Hai Phong, Nam Trieu Ward, Hai Phong City · +84 817 888 198

Taiwan factory: Zhongli District, Taoyuan City · +886 3-451-8806

Email: sales@fullsharp.com.vn · **Website:** www.fullsharp.com

Specifications may vary with the ordered configuration. Please contact FullSharp for exact details.