FS-WilsonX200A-RR




FS-WilxonX200A-RR is a high-quality roll lifter with a 130 kg load capacity, built from 304 stainless steel for durability and food-grade hygiene. It offers a lifting height of 160 to 1400 mm, a standard lifting speed of 125 mm/s and IP41 protection. FS-WilxonX200A-RR supports two battery types (lead-acid and lithium) with fast charging, and offers optional automatic horizontal rotation and the smart ASP position memory system. Suitable for rolls with ID ≥ 3” and width W ≤ 1300 mm, it is well suited to production environments that require precise and safe lifting.

Specifications

Parameter	FS-WilxonX200A-RR
Dimensions	1500 x 1390 x 2026
Lifting height R ***Lifting height***	160 - 1400
Load capacity ***Load***	130kg
Lifting speed ***Lifting speed***	125 mm/s (standard)
Protection rating ***Protection level***	IP41
Battery ***Battery***	Lead-acid battery DC24V20AH **standard** Lithium battery DC24V15AH **optional**
Charging ***Charging***	Input 100–240V AC, 50/60Hz
Charging time ***Charging time***	Lead-acid battery: 7 hours Lithium battery: 70 minutes
Material ***Material***	304 stainless steel

Parameter	FS-WilxonX200A-RR
Applicable rolls ***Applicable roll material***	ID ≥ 3” W ≤ 1300mm
Options ***Options***	Smart ASP lifting: 3 working positions x 5 memory positions (15 positions) Push-button automatic horizontal rotation Special materials on request: contact Full-Sharp

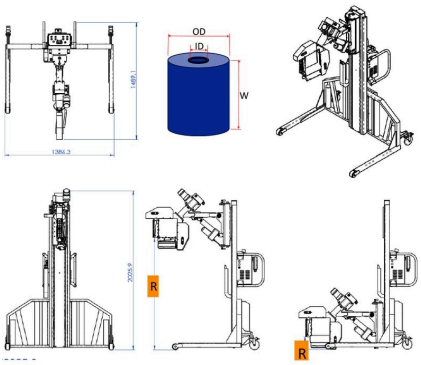

Contact us for consultation and a quotation

Vietnam factory: Workshop A1-1, VSIP Hai Phong, Nam Trieu Ward, Hai Phong City · +84 817 888 198

Taiwan factory: Zhongli District, Taoyuan City · +886 3-451-8806

Email: sales@fullsharp.com.vn · **Website:** www.fullsharp.com

Specifications may vary with the ordered configuration. Please contact FullSharp for exact details.