FS-WilsonX220A-X270A-VR




The FS-WilxonX220A-VR and FS-WilxonX270A-VR roll lifters are designed for the food and pharmaceutical industries and other environments with strict hygiene and durability requirements. With a load capacity of up to 130kg and a maximum lifting height of 1500mm – 2000mm , they run on a lead-acid battery or an optional fast-charging lithium battery, with a durable and safe 304 stainless steel body. Advanced functions include: The equipment suits clean environments, is easy to clean, and supports precise, continuous and professional lifting.

Specifications

Model	FS-WilxonX220A-VR	FS-WilxonX270A-VR
Dimensions	1514 x 695 x 2200	1514 x 695 x 2700
Lifting height R ***Lifting height***	150 - 1500	150 - 2000
Load capacity ***Load***	130kg	130kg
Lifting speed ***Lifting speed***	125 mm/s (standard)	
Protection rating ***Protection level***	IP41	
Battery ***Battery***	☐ Lead-acid battery DC24V20AH **standard** ☐ Lithium battery DC24V15AH **optional**	
Charging ***Charging***	Input 100-240V AC, 50/60Hz	
Charging time ***Charging time***	☐ Lead-acid battery: 7 hours ☐ Lithium battery: 70 minutes	
Material ***Material***	304 stainless steel	

Model	FS-WilxonX220A-VR	FS-WilxonX270A-VR
Applicable rolls ***Applicable roll material***	ID 3” or 6” W ≤ 1300mm	
Options ***Options***	ASP (automatic deceleration when approaching the set position) 15 storable lifting positions; press a button to move to a stored position automatically Push-button automatic horizontal rotation For special roll materials or lifting requirements, contact Full-Sharp	

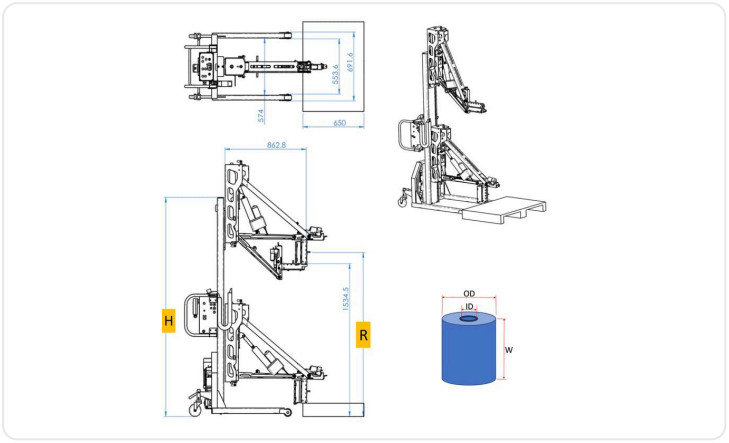

Contact us for consultation and a quotation

Vietnam factory: Workshop A1-1, VSIP Hai Phong, Nam Trieu Ward, Hai Phong City · +84 817 888 198

Taiwan factory: Zhongli District, Taoyuan City · +886 3-451-8806

Email: sales@fullsharp.com.vn · **Website:** www.fullsharp.com

Specifications may vary with the ordered configuration. Please contact FullSharp for exact details.