FULLSHARP



FULLSHARP is a leading Taiwanese manufacturer of vacuum tube lifting systems, offering a wide range of lifters and spare parts. Its products are designed for long-term use in production. Made in Taiwan. The #1 best-selling vacuum lifter line in Taiwan. Outstanding quality, engineering and value.









Choose the right system for your needs:



Single handle

Single handle

- Ergonomic one-hand control
- Easy to operate

- Quick-change suction pads
- Optional remote control to switch off the pump
- Best for carton boxes under **25kg**



Dual handle

Double handle

- Stronger suction than the single handle
- Adjustable lifting height
- Interchangeable suction pads
- Optional remote control to switch off the pump
- Best for sacks and heavy items over **25kg**

Choosing the Right Vacuum Lifter for Optimal Performance

FULLSHARP vacuum lifters are designed for efficient, continuous-duty handling, allowing multiple lifts per minute.

FULLSHARP vacuum lifting systems work on a simple principle: a remotely connected vacuum pump generates suction in the lift tube and control handle. When the suction head and pads contact the load, they grip its surface firmly by vacuum.

FULLSHARP offers lifting systems in a range of sizes and configurations to suit different needs. Choosing the right equipment increases productivity, ensures workplace safety and reduces costs.


FULLSHARP encourages customers to send samples for load testing to determine the actual lifting capacity. The FULLSHARP team can assess the surface of the load or run tests at the factory in Hai Phong.

Factors affecting the lifting capacity of the system include:

- Weight and material of the load (porous, semi-porous, non-porous)
- Available gripping surface area
- Type of load (loose, light or heavy, bulky...)
- Vacuum pump system (high/low pressure)
- Vacuum level achieved
- Size and shape of the suction head
- Vacuum safety factor (ratio of tube diameter to suction area)



Yellow lifting tube

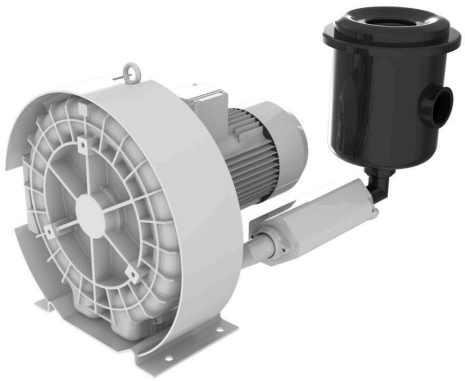

Bơm chân không Yubang

Technical Specifications

Model	Voltage (V)	Hz	kW	Comp. Current (A)	Max Comp. (mbar)	Vac. Current (A)	Max Vac. (mbar)	Air (m^3/min)	dB
RB60-1-5B*	200-240/ 345-416	50	2.2	10.8-10.6/ 6.1-5.8	+210	10.3-9.9/ 6.1-5.7	-220	5.3	77
RB60-1-6B*	208-275/ 380-480	60	2.55	11.2-9.4/ 6.1-5.4	+150	11.1-9.2/ 6.1-5.4	-170	6.3	81
RB60-1-6B*	200-240/ 345-416	50	3	12.6-10.2/ 6.6-6.0	+230	12.1-11.7/ 6.5-6.1	-280	6.3	81
RB60-1-7B*	208-275/ 380-480	60	3.45	14.1-11.6/ 6.7-6.7	+230	11.8-10.4/ 6.7	-360	6.3	81
RB60-1-7B*	200-240/ 345-416	50	4.8	16.7-15.8/ 9.5-9.5	+320	17.8-15.9/ 9.3-9.6	-380	5.3	81
RB60-1-8B*	208-275/ 380-480	60	5.5	20.5-20.7/ 11.9-11.7	+500	17.8-15.9/ 10.7-10.4	-440	6.3	81
RB60-1-9B*	200-240/ 345-416	50	7.5	25.3-27.9/ 13.6-15.7	+570	18.9-25.1/ 10.7-14.1	-440	6.3	81
RB60-1-9B*	208-275/ 380-480	60	8.6	31.3-28.7/ 16.9-16.3	+600	18.9-25.1/ 10.7-14.1	-440	6.3	81
RB80-1-4B*	220-275/ 380-480	60	8.3	37.2/13.1	+290	37.2/13.1	-290	11.3	81
RB80-1-6B*	220-275/ 380-480	60	22	76/44	+780	76/44	-470	11.3	81

Contact us for consultation and a quotation

Vietnam factory: Workshop A1-1, VSIP Hai Phong, Nam Trieu Ward, Hai Phong City · +84 817 888 198

Taiwan factory: Zhongli District, Taoyuan City · +886 3-451-8806

Email: sales@fullsharp.com.vn · **Website:** www.fullsharp.com

Specifications may vary with the ordered configuration. Please contact FullSharp for exact details.