
KBK Rail System 125kg-2000kg



KBK RAIL SYSTEM

KBK LIGHT CRANE SYSTEM

Compatible Hoists

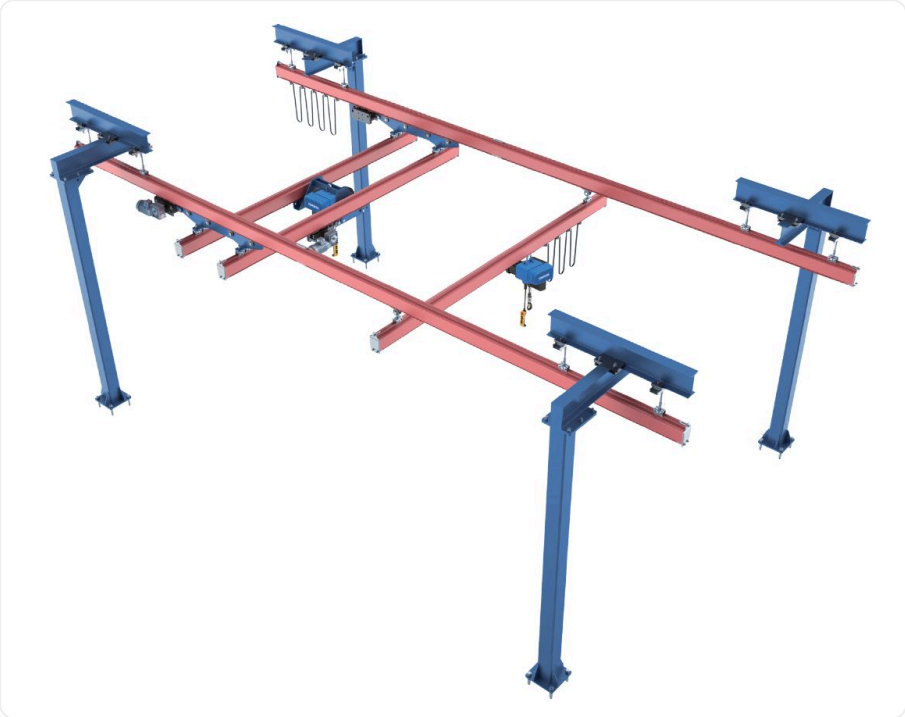

Pa lăng tương thích 1



Pa lăng tương thích 2



Pa lăng tương thích 3



Pa lăng tương thích 4



Pa lăng tương thích 5




Pa lăng tương thích 6



Pa lăng tương thích 7

The **KBK** rail crane system includes monorail, single-girder, double-girder, telescopic-girder and other configurations, with rated loads from **0.125 t to 2 t**, covering a very wide range of applications — especially suited to material flow lines in modern manufacturing.
The crane system is light and flexible, highly reliable, and very stable. All components are standard modules, ensuring consistent high quality and enabling volume production. KBK profiles and standard modules are bolted together: easy to install, economical and practical, saving space and factory floor area while reducing energy consumption and improving productivity. The KBK system can be operated manually and also supports automatic and semi-automatic operation.

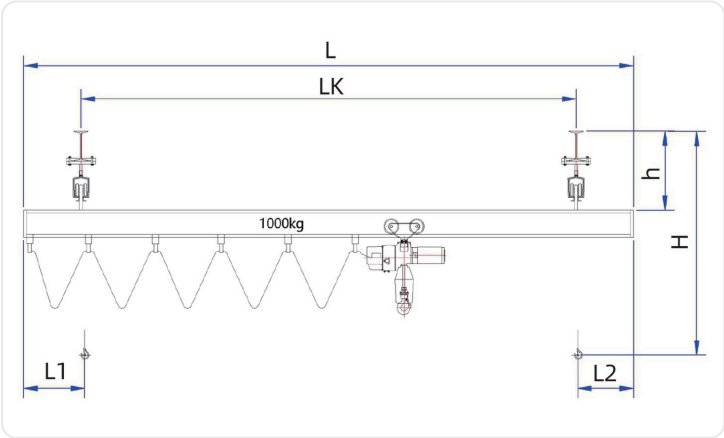

KBK Dimension Diagram: L, LK, H, h, L1, L2

Dimension symbols: L – overall length; LK – span; H – overall height; h – girder height; L1, L2 – suspension spacing.

SPECIFICATIONS

Rated Load (kg)		125	250	500	1000
Span (mm) LK		8500	7500	6000	5000
Overall Length (mm) L		9000	8000	7000	6000
Height (mm)	H	808	878	948	1100
	h	335	335	335	365
Suspension Spacing (mm)	L1	470	470	525	585
	L2	100	100	100	250
Travel System	Hoist Trolley	Manual / Electric Drive			
	End Carriage	Manual / Electric Drive			
Overall Duty Class		A4 / A5			

* Both the hoist trolley and end carriages are available with manual or electric drive. Actual dimensions are subject to the final approved drawing.

Contact us for consultation and a quotation

Vietnam factory: Workshop A1-1, VSIP Hai Phong, Nam Trieu Ward, Hai Phong City · +84 817 888 198
Taiwan factory: Zhongli District, Taoyuan City · +886 3-451-8806
Email: sales@fullsharp.com.vn · **Website:** www.fullsharp.com

Specifications may vary with the ordered configuration. Please contact FullSharp for exact details.