


Mini Crane, Hook Type (Powered)

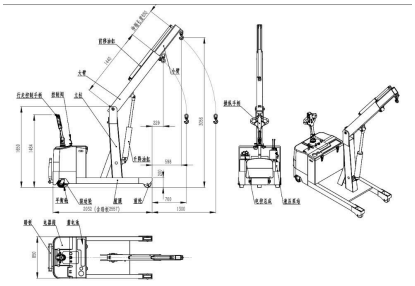

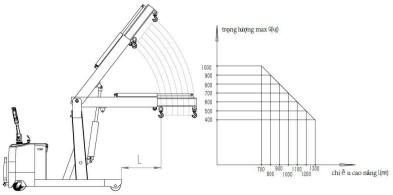

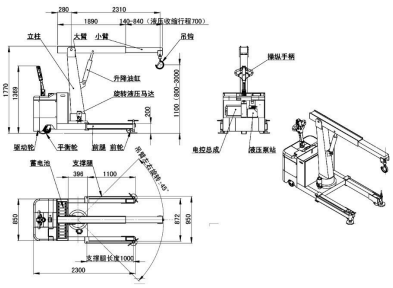


Overview

FULLSHARP Mini Crane

- Fully electric slewing mini crane with lifting capacity up to 1,000 kg
- Double electric telescopic boom with reach up to 3000 mm; electric steering wheel for easy maneuvering in tight spaces

- Stepless travel speed control with optional wireless remote. Precise load positioning, ideal for applications that demand high flexibility
- 180° electric slewing simplifies handling of molds, CNC loading and machine component assembly
- Multi-function display showing battery level and battery voltage



FullSharp Mini Crane - View 2



FullSharp Mini Crane - View 3



FullSharp Mini Crane - View 4

Mini Crane Specifications

Specifications	FSDC-A-0530	FSDC-A-1025	FSDC-A-1030
Lifting capacity (kg)	500	1000	1000
Max. lifting height (mm)	3000	2500	3000
Battery capacity (V/Ah)	24/165	24/165	24/210
Charger (V/A)	24/20	24/20	24/30
Lift motor power (kW)	2.5	2.5	2.5
Drive motor power (kW)	AC1.2	AC1.2	AC1.2
Slewing angle	±90°	±90°	±90°
Outrigger length (mm)	950	950	950
Inner width between outriggers (mm)	680	680	680
Outer width of outriggers (mm)	990	990	990
Ground clearance (mm)	200	200	200
Distance from hook to outriggers (mm)	420	400	350
Truck weight (kg)	730	730	760
Overall dimensions L×W×H (mm)	2670×990×1800	2900×990×1800	2900×990×1800
Turning radius (mm)	2800	3100	3100
Min. aisle width (mm)	1100	1100	1100
Drive wheel (mm)	1×Φ250×80	1×Φ250×80	
Auxiliary wheels (mm)	2×Φ150×50	2×Φ150×50	
Front wheels (mm)	2×Φ150×75	2×Φ150×75	
Gradeability (%)	4/6	4/6	
Travel speed laden/unladen (km/h)	4/6 Loaded/Unloaded	4/6 Loaded/Unloaded	

Specifications	FSDC-A-0530	FSDC-A-1025	FSDC-A-1030
Lifting speed laden/unladen (mm/s)	45/50 Loaded/Unloaded	45/50 Loaded/Unloaded	
Lowering speed laden/unladen (mm/s)	45/40 Loaded/Unloaded	45/40 Loaded/Unloaded	
Brake	Electromagnetic braking		

Contact us for consultation and a quotation

Vietnam factory: Workshop A1-1, VSIP Hai Phong, Nam Trieu Ward, Hai Phong City · +84 817 888 198
Taiwan factory: Zhongli District, Taoyuan City · +886 3-451-8806
Email: sales@fullsharp.com.vn · **Website:** www.fullsharp.com

Specifications may vary with the ordered configuration. Please contact FullSharp for exact details.